




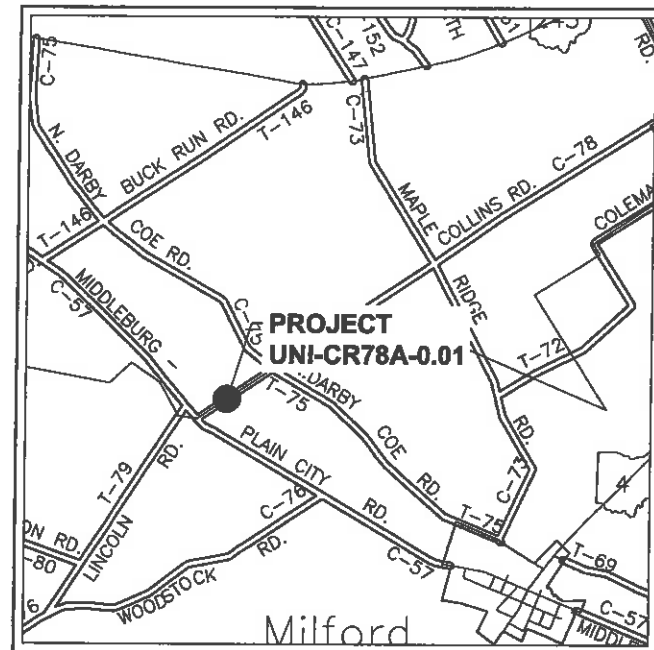

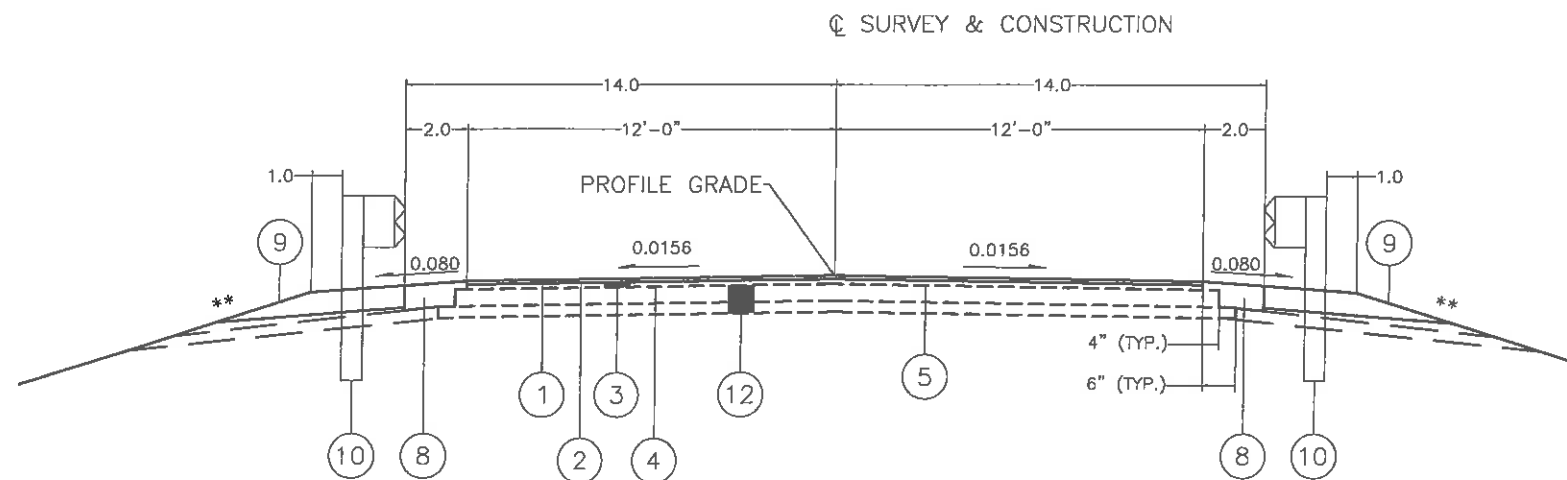

** SEE CROSS SECTIONS FOR SLOPES

STA. 0+13.00 TO STA. 0+29.00 = 16 FT.

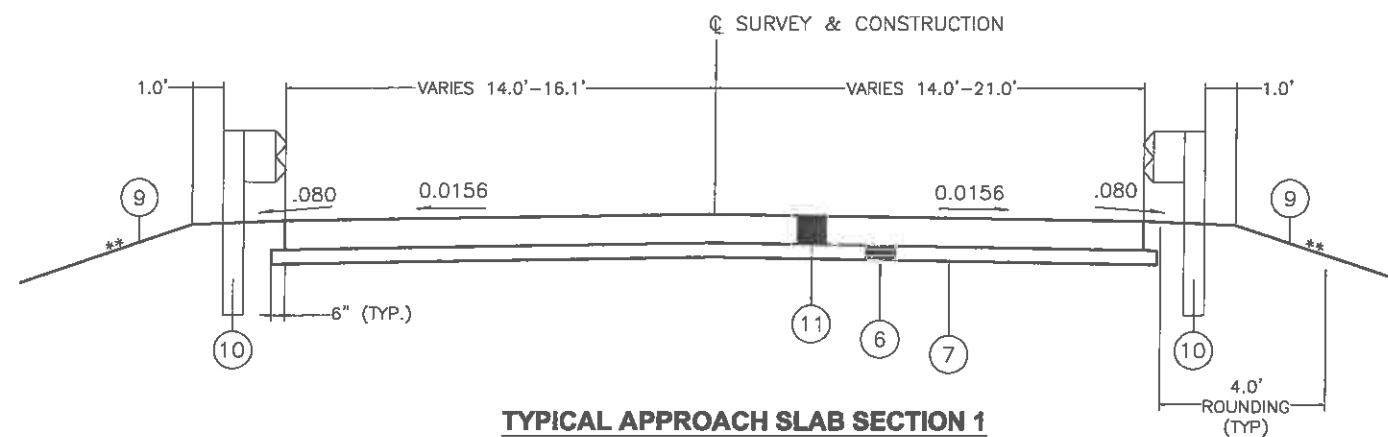

** SEE CROSS SECTIONS FOR SLOPES

STA. 0+29.00 TO STA. 0+49.00 = 20.00 FT.

LEGEND:

- ① = ITEM 441 = 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG64-22
- ② = ITEM 407 = TACK COAT (APPLIED @ 0.040 GAL/SQ YD)
- ③ = ITEM 441 = 1" AVG. VARIABLE LEVELING A.C. COURSE, TYPE 1, (448)
- ④ = ITEM 407 = TACK COAT (APPLIED @ 0.075 GAL/SQ YD)
- ⑤ = ITEM 254 = PAVEMENT PLANING, ASPHALT CONCRETE- 4"
- ⑥ = ITEM 304 = 6" AGGREGATE BASE
- ⑦ = ITEM 204 = SUBGRADE COMPACTION
- ⑧ = ITEM 304 = 8" AGGREGATE BASE
- ⑨ = ITEM 659 = SEEDING AND MULCHING
- ⑩ = ITEM 606 = GUARDRAIL, TYPE MGS (SEE NOTE 2)
- ⑪ = ITEM 526 = 13" REINFORCED CONCRETE APPROACH SLAB
- ⑫ = EXISTING ASPHALT CONCRETE

NOTES:

1. ROUNDING (RNDG.) SHALL BE 4'-0" WHERE FORESLOPE GRADING BREAK BEHIND GUARDRAIL IS STEEPER THAN 6:1. REFER TO THE CROSS SECTIONS FOR ADDITIONAL INFORMATION.

2. REFER TO PLAN AND PROFILE SHEETS FOR MGS GUARDRAIL WORK LIMITS.

* REFER TO CROSS SECTIONS FOR SLOPE

PGL = PROFILE GRADE LINE

M.E. = MATCH EXISTING


[A] - VARIES, SEE PLAN & PROFILE SHEET FOR ADDITIONAL INFORMATION.

[B] - VARIES, SEE PLAN & PROFILE SHEET FOR ADDITIONAL INFORMATION.

TYPICAL SECTIONS

UNI-CR78A-0.01

2/38

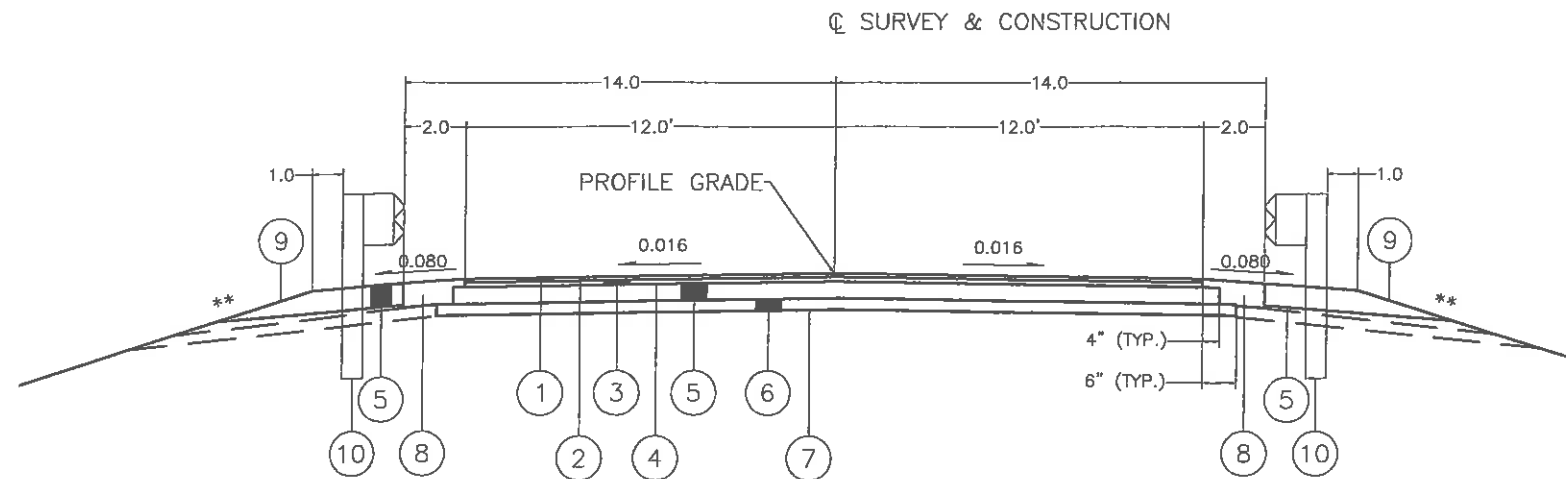


TYPICAL SECTION 2

(COLLINS ROAD)

STA. 2+31 TO STA. 3+00 = 69 FT.

** SEE CROSS SECTIONS FOR SLOPES

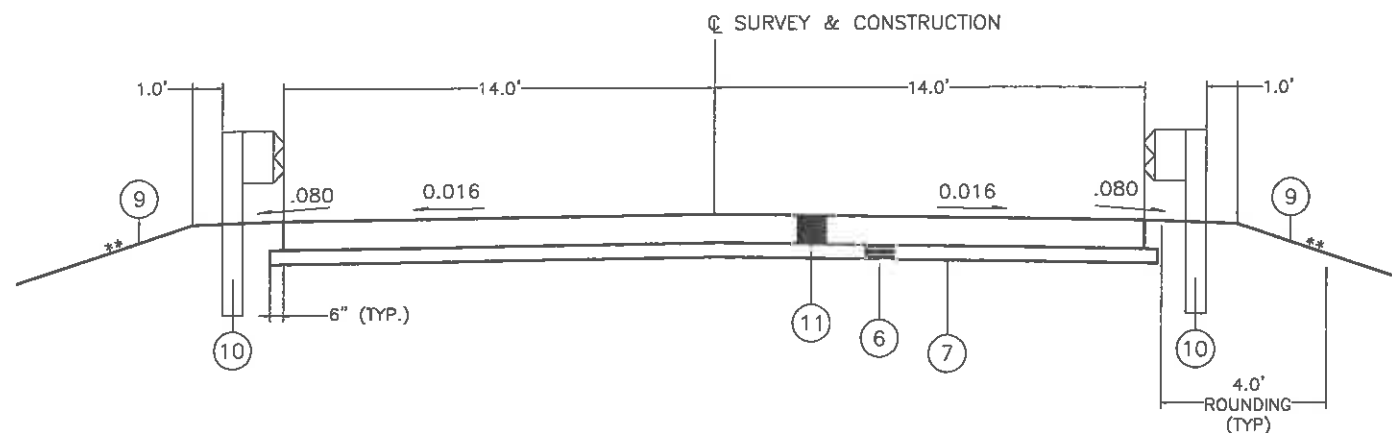

TYPICAL APPROACH SLAB SECTION 2

(COLLINS ROAD)

STA. 2+16.00 TO STA. 2+31.00 = 15 FT.

** SEE CROSS SECTIONS FOR SLOPES

LEGEND:

- ① = ITEM 441 - 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG64-22
- ② = ITEM 407 - TACK COAT (APPLIED @ 0.040 GAL/SQ YD)
- ③ = ITEM 441 - 1-3/4" A.C. INTERMEDIATE COURSE, TYPE 2, (448)
- ④ = ITEM 407 - TACK COAT (APPLIED @ 0.075 GAL/SQ YD)
- ⑤ = ITEM 301 - 4" ASPHALT CONCRETE BASE, PG64-22
- ⑥ = ITEM 304 - 6" AGGREGATE BASE
- ⑦ = ITEM 204 - SUBGRADE COMPACTION
- ⑧ = ITEM 304 - 2" AGGREGATE BASE
- ⑨ = ITEM 659 - SEEDING AND MULCHING
- ⑩ = ITEM 606 - GUARDRAIL, TYPE MGS (SEE NOTE 2)
- ⑪ = ITEM 526 - 12" REINFORCED CONCRETE APPROACH SLAB

NOTES:

1. ROUNDING (RNDG.) SHALL BE 4'-0" WHERE FORESLOPE GRADING BREAK BEHIND GUARDRAIL IS STEEPER THAN 6:1. REFER TO THE CROSS SECTIONS FOR ADDITIONAL INFORMATION.

2. REFER TO PLAN AND PROFILE SHEETS FOR MGS GUARDRAIL WORK LIMITS.

* REFER TO CROSS SECTIONS FOR SLOPE

PGL = PROFILE GRADE LINE

M.E. = MATCH EXISTING


[A] - VARIES, SEE PLAN & PROFILE SHEET FOR ADDITIONAL INFORMATION.

[B] - VARIES, SEE PLAN & PROFILE SHEET FOR ADDITIONAL INFORMATION.

TYPICAL SECTIONS

UNI-CR78A-0.01

3/38

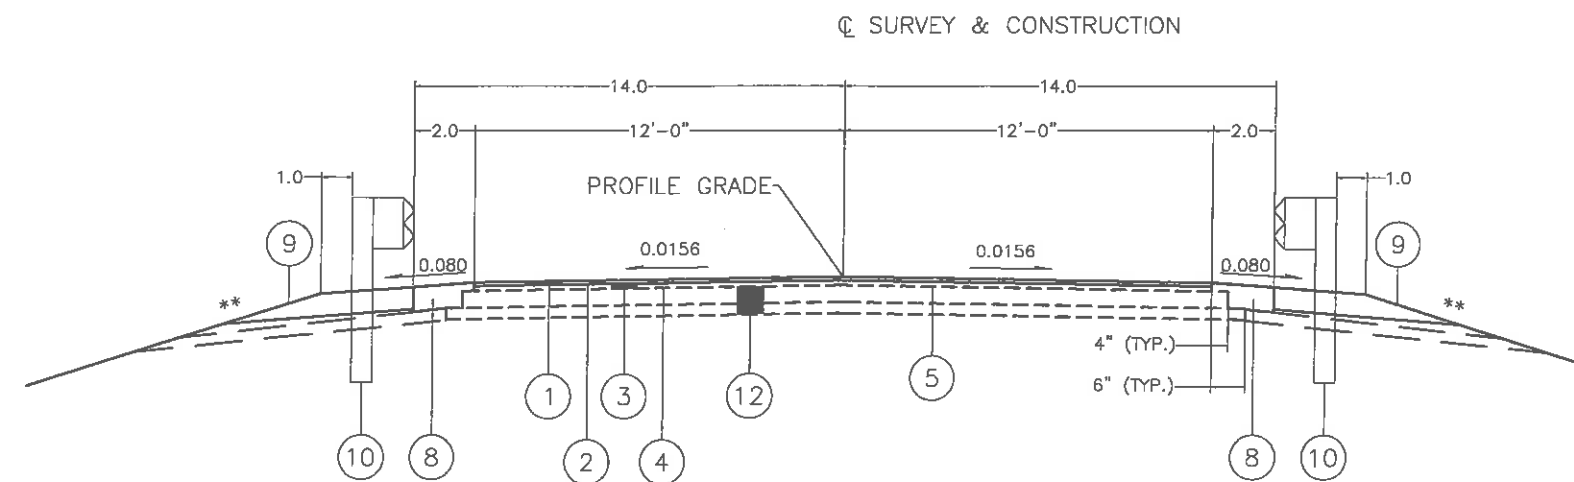

#

||
||
||

||
||
||

